

# CHERCAM: A Cherenkov imager for the CREAM experiment

M. Mangin-Brinet<sup>a,\*</sup>, A. Barrau<sup>a</sup>, R. Bazer-Bachi<sup>b</sup>, O. Bourrion<sup>a</sup>, J. Bouvier<sup>a</sup>,  
B. Boyer<sup>a</sup>, M. Buénerd<sup>a</sup>, L. Derome<sup>a</sup>, L. Eraud<sup>a</sup>, R. Foglio<sup>a</sup>, L. Gallin-Martel<sup>a</sup>,  
O. Ganel<sup>c</sup>, C.H. Kim<sup>c</sup>, L. Lutz<sup>c</sup>, A. Malinine<sup>c</sup>, A. Menchaca-Rocha<sup>d</sup>, J.N. Périé<sup>b</sup>,  
Y. Sallaz-Damaz<sup>a</sup>, J.-P. Scordilis<sup>a</sup>, E.S. Seo<sup>c</sup>, P. Walpole<sup>c</sup>, S.Y. Zinn<sup>c</sup>

<sup>a</sup>Laboratoire de Physique Subatomique et de Cosmologie, Grenoble, France

<sup>b</sup>Centre d'Etude Spatiale des Rayonnements, UFR PCA - CNRS - UPR 8002, Toulouse, France

<sup>c</sup>University of Maryland, College Park, MD, USA

<sup>d</sup>Universidad Nacional Autónoma de México, México

Available online 28 November 2006

## Abstract

The CREAM experiment (Cosmic Ray Energetics and Mass) is dedicated to the measurement of the energy spectrum of nuclear elements in cosmic rays, over the range  $10^{12}$ – $10^{15}$  eV. The individual elements separation, which is a key feature of CREAM, requires instruments with strong identification capabilities. A proximity focused type of Cherenkov imager, CHERCAM (CHERenkov CAMera), providing both a good signature of downgoing  $Z = 1$  particles and good single element separation through the whole range of nuclear charges [Buénerd, et al., 28th ICRC, Tsukuba, OG 1.5, 2003, p. 2157. [1]], is under development. After a brief introduction, the main features and the construction status of the CHERCAM are being summarized.

© 2006 Elsevier B.V. All rights reserved.

PACS: 29.40.Ka; 96.40.–z; 96.40.De; 96.50.Pw

Keywords: Cosmic rays; Cherenkov detector; Charge identification

## 1. Introduction

The CREAM experiment (Cosmic Ray Energetics and Mass) addresses open questions on the nature and the origin of charged particles cosmic rays. It has begun to measure high energy cosmic rays at the frontier of the statistical limits accessible to space-based experiments. Measurements of the cosmic ray spectrum of nuclear elements from proton to iron in the energy range  $\approx 10^{12}$ – $10^{15}$  eV, will provide invaluable data on cosmic ray spectral characteristics and/or abundance changes which could be related to the acceleration limit in the shock front of supernovae. They will also provide the first measurements of secondary to primary ratios, like B/C, in this energy domain. The

individual nuclear elements separation will allow to probe the current models of acceleration mechanisms, and will provide hints for the interpretation of the “knee” in the inclusive spectrum, and for the physics of cosmic ray galactic transport.

CREAM is planned to be the first experiment to be flown on a new Ultra-Long Duration Balloon (ULDB), currently under development by the NASA.

The experiment includes a set of sub-detectors able to measure the particle energy and charge [2]. The energy measurement is performed by means of a hadronic calorimeter with nearly constant resolution over the three orders of magnitude covered. The calorimeter can be combined with a TRD in some flight configurations. The particle charge measurement will cover the range  $1 < Z < \approx 30$  with a charge resolution better than 0.3 charge unit expected. This charge resolution will be achieved by means of a combination of scintillation hodoscope, silicon pad

\*Corresponding author.

E-mail address: [mariane@lpsc.in2p3.fr](mailto:mariane@lpsc.in2p3.fr) (M. Mangin-Brinet).

counters, and a Cherenkov imager **CHERCAM**(CHER-  
enkov CAMera), optimized for charge measurements and  
providing a constant resolution through the range of  
nuclear charge.

**2. CHERCAM architecture**

CHERCAM is a proximity focusing imager derived  
from the solution developed for AMS experiment, whose  
principle is illustrated in Fig. 1.

The Cherenkov radiator consists in a 1 cm-thick silica  
aerogel plane, made of  $11 \times 11 \text{ cm}^2$  tiles with a refractive  
index around 1.07.

The Cherenkov radiator plane is separated by a 10 cm  
ring expansion gap, from a photon detector plane  
consisting of a 1600 photomultiplier tubes array (Photonis  
XP3112), backed with dedicated front-end electronics,  
power supply, and read-out electronics. The latter employs  
the same 16-channel ASIC circuit than the one used for the  
AMS Cherenkov imager [3].

The mechanical structure of the detector is illustrated in  
Fig. 2. The counter is divided into two frames for  
mechanical reasons. The aerogel will be fixed onto the  
top lid while the lower frame will contains the photo-  
multipliers array.

**3. CHERCAM simulation**

The development of a GEANT4 simulation of **CHERCAM**  
is in progress, to investigate the detailed features of  
the detector, validate the technical choices and study the  
limit of the detector performance. The simulation includes

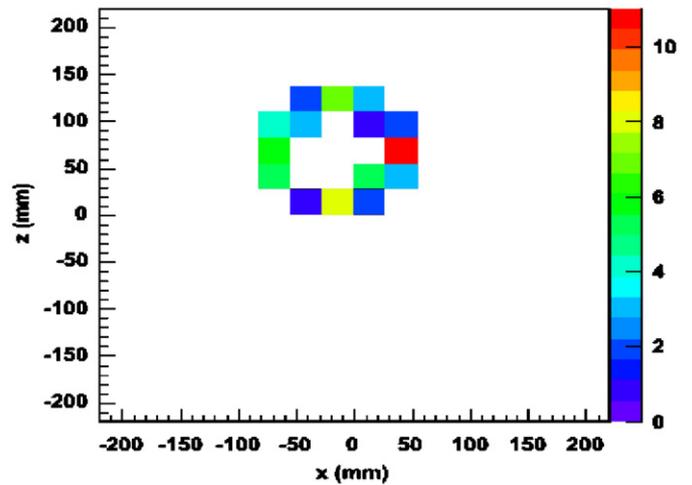
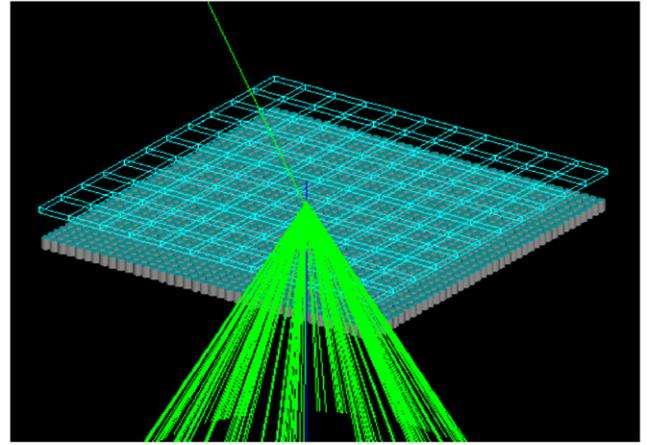


Fig. 3. Example of a simulated event (top) in the Cherenkov counter (1 TeV Helium) and photon impacts detected (bottom).

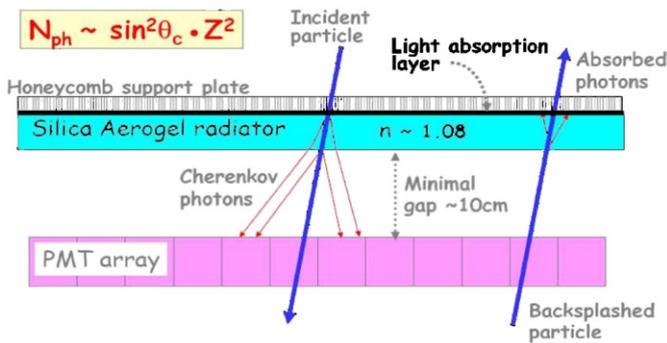


Fig. 1. Scheme of the Cherenkov imager principle.

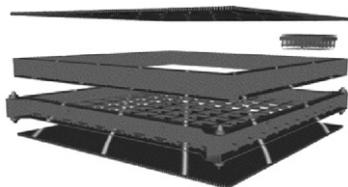


Fig. 2. Exploded view of the CHERCAM mechanical structure. The detector plane is arranged in  $5 \times 5$  blocks of 64 PMT. Each block is divided into four modules of  $4 \times 4$  PMT, each being read out by a single 16-channel FE electronics circuit.

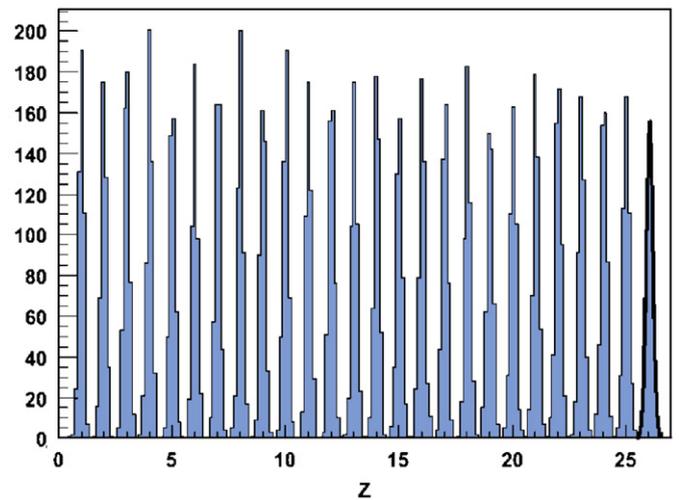


Fig. 4. Charge reconstruction for 11,000 simulated events uniformly distributed in charge.

the photomultipliers modeling and contains as physical  
processes, the Cherenkov effect, the Rayleigh scattering  
and reflection. The photocathode quantum efficiency is

also taken into account according to the data given by the PMT manufacturer (Fig. 3).

Reconstruction codes are being developed, with a special interest in the control of the geometrical efficiency determination. The first results of the simulation show that a combination of incident particle position reconstruction and ring overlap study can provide a charge reconstruction better than  $\Delta Z = 0.3$  over the full range of charges concerned (see Fig. 4).

#### 4. Conclusion

The development of the CHERCAM subdetector for the CREAM experiment is ongoing. The construction is in progress and two-third of the counter are expected to be

ready for a beam test at CERN SPS in October 2006. CHERCAM will be integrated in the CREAM detector at the beginning of next year and participate to the 2007 flight campaign.

#### Acknowledgement

Part of this program has been conducted under the INTAS contract 03-52-5579.

#### References

- [1] M. Buénerd, et al., 28th ICRC, Tsukuba, OG 1.5, 2003, p. 2157.
- [2] E.S. Seo, et al., Adv. Space Res. 33 (10) (2004) 1777.
- [3] L. Gallin-Martel, et al., Nucl. Instr. and Meth. A 504 (2003) 2783.